

NOX 150 22M

Centrifugal single stage pump for water recirculation and filtration.

PUMP DESCRIPTION

Water recirculation and filtration for medium residential swimming pools. Silent. Self-priming up to 4m.

PRODUCT INFORMATION

Maximum height (m)	16
Maximum flow (m3/h)	25.5
Voltage (V)	230
Frequency (Hz)	50
Input power P1 (kW)	1.6
Intensity (A)	7.1
Capacitor capacity	30µF-450V
Pressure range (m)	16-5
Motor power P2 (kW)	1.1
Maximum working pressure (bar)	1.5
Number of motor phases	single-phase
Number of poles	2
Number of impellers	1
On/off switch	No
Plug type	without plug
Minimum flow (m3/h)	0.7

FEATURES

ELECTRICAL FEATURES

Electrical isolation	F Class	Protection rating	IPX5
Reset	Automatic	Motor type	Asynchronous
Service factor	S1		

LIMITATIONS

Maximum suction (m)	4	Water temperature (°C)	Max: 40

MATERIALS

Mechanical seal	Aluminium-Graphite	Suction body	Technopolymer
Pump body	Technopolymer	Discharge body	Technopolymer
Diffuser/s	Technopolymer	Pump shaft	Stainless steel AISI 431
Motor casing	Aluminium	Impeller/s	Technopolymer
O-rings	NBR/EPDM	Pre-filter	Technopolymer


MANUFACTURING FEATURES

Suction diameter	50mm	Discharge diameter	50mm
Seal type	Mechanical seal	Suction connection type	Glue union
Discharge connection type	Glue union		


SPECIFICATIONS

PERFORMANCE
Frequency and Units


HEAD

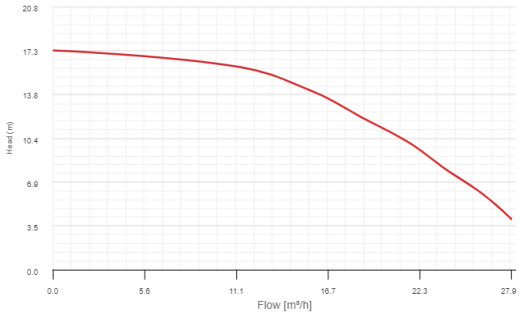

POWER

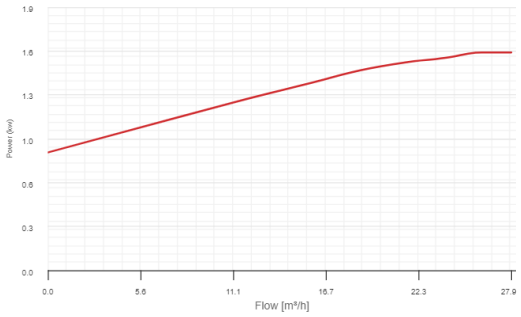

EFFICIENCY

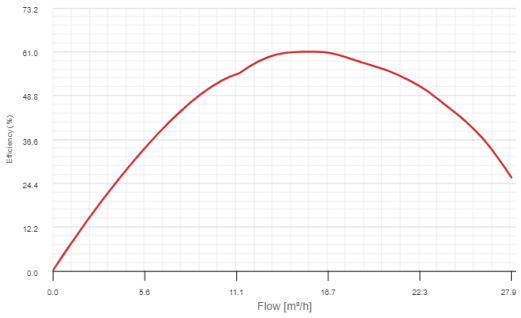

HYDRAULIC DATA — NOX 150 22M single-phase Model

Flow (Q) m3/h	0.0	11.3	15.9	18.8	21.7	23.9	26.1	27.8
Flow (Q) l/min	0.0	188.7	265.0	312.8	360.8	397.9	434.3	463.9
Head (H) m	17.3	16.0	14.0	12.0	10.0	7.9	6.0	4.0